
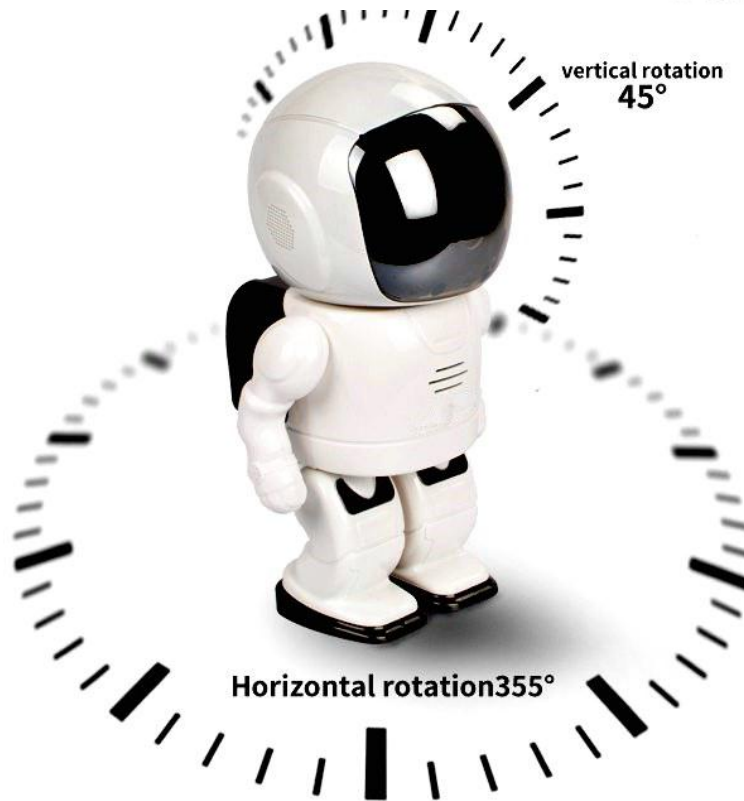


**Astronaut Wireless IP Camera**

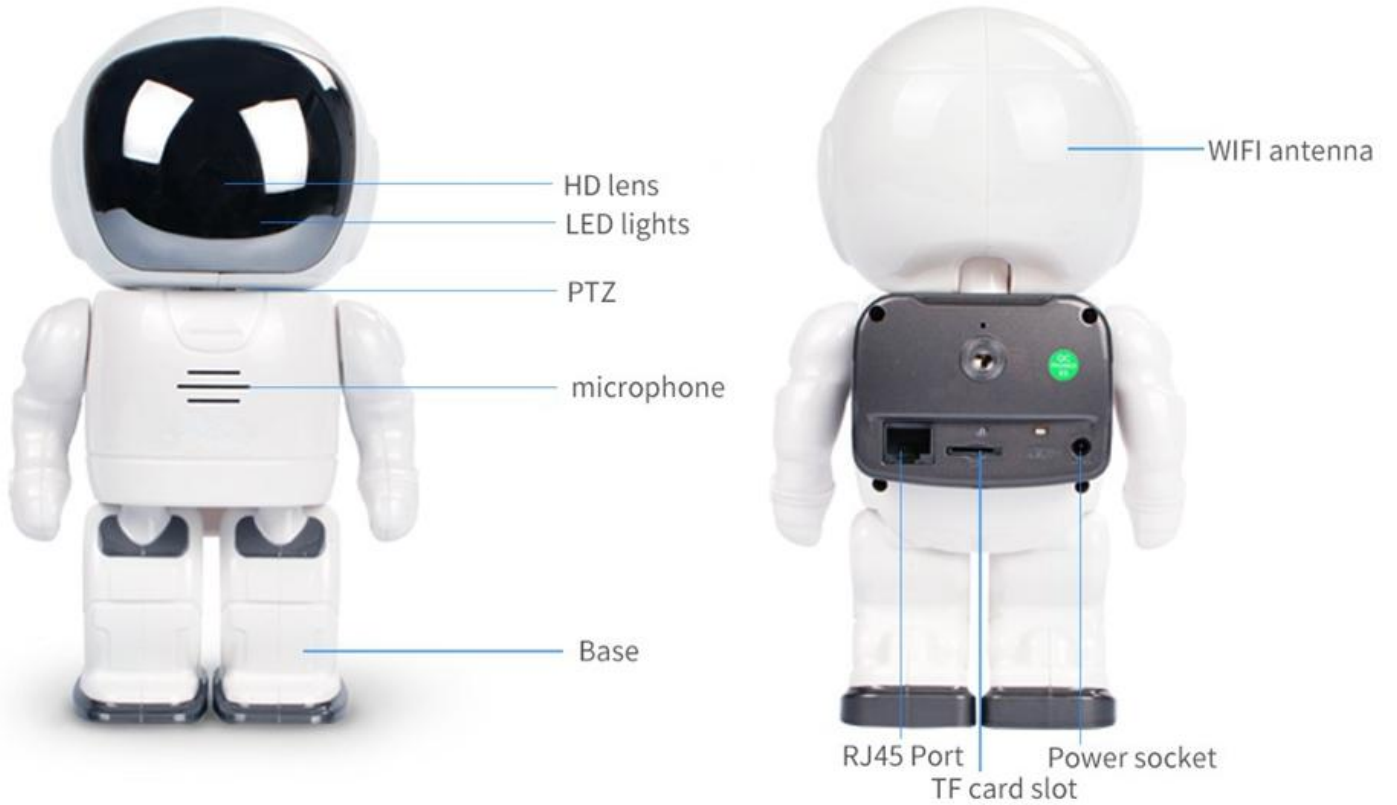

- |  |   |  |  |   |  |
|--|---|--|--|---|--|
| <br>Wireless networking | <br>720P & 960P      | <br>mobile surveillance | <br>computer remote       | <br>P2P cloud    | <br>multiplayer online watching |
| <br>Alarm notification  | <br>motion detection | <br>voice intercom      | <br>infrared night vision | <br>355°rotation | <br>support TF card             |

Astronaut Boy wander in space with you, he is fully equipped and well prepared. Night vision, sensitive motion capture function, two-way communication, fantastic gears to keep you safe, he is a good assistant, honest and brave. It will be much more comfortable to talk with a brave spaceman than an unfriendly monitor, which is our purpose: Make monitoring become accompanying.

### Technical Parameters:

Model		A180
<b>Operating system</b>	Compression Technology	New optimized H.264 Baseline Profile compression algorithm
<b>Video</b>	Sensor Type	1.3 million CMOS sensor & 2.0 million CMOS sensor
	Resolution	1280*960
	Frame rate	1-25fps
	Minimum Illumination	Daytime mode 0.1 LUX, night vision mode 0.01 LUX
	Signal to noise ratio	≥38dB
	CMOS Performance	Supports automatic white balance, automatic gain control, automatic back lighting compensation
	Lens/visual Angle	3.6 mm megapixel @f1.4/74'
<b>Audio</b>	Coding Standards	AMR/G.711A
	Audio input	Support - 38dB microphones
<b>Pan-Tilt</b>	Control	Level 355, up and down 60 degrees
<b>Network</b>	Network Interface	10Mbps / 100Mbps ADAPTS to the RJ45 interface
	Network Protocol	TCP/IP, HTTP, TCP, UDP, SMTP, DHCP, DNS, P2P, etc
	Wireless	WIFI802.11 b/g/n wireless network
<b>Security Function</b>	Alarm input	433 band learning wireless sensor alarm input
	Alarm Detection	Maximum available 64 wireless alarm sensor, support one key close/withdrawal
	Motion Detecting	support
<b>APP</b>		Yosee (interesting)
<b>System Requirements</b>	System Configuration	Ios7.0, version 3.0

<b>Other</b>	Onvif protocol	support
	Power Supply	DC5V2A
	Working Temperature	-10°C~+50°C
	Working Humidity	≤80%RH
<b>Package Size</b>	Single Weight	640g
	Single Package Size	307*148*110mm
	FCL Weight	19.2kg/22PCS
	FCL Packaging Size	635*420*580mm/22PCS

## Remote real-time viewing

Anytime, anywhere to master the desired information

THE DEVELOPMENT AND PROMOTION OF AUDUBE FOCUS ON INTELLIGENT FAMILY ROBOT, INTELLIGENT ROBOT IS INTRODUCED IN AUSTRIA DU-RATIC.



1  
**Baby care**  
14km



"the young mother at work spare time to see what my baby is doing?"



2  
**Miss parents**  
1500km



"Outside work can not always go home to miss the parents and parents both chat?"



3  
**Push alarm**  
20km



"No one at home to encounter any abnormal alarm immediately push paper mobile phonet?"



4  
**Look at pets**  
18km



"When we are not at home when the dogs and cats at home early doing it you are not curious to know?"